

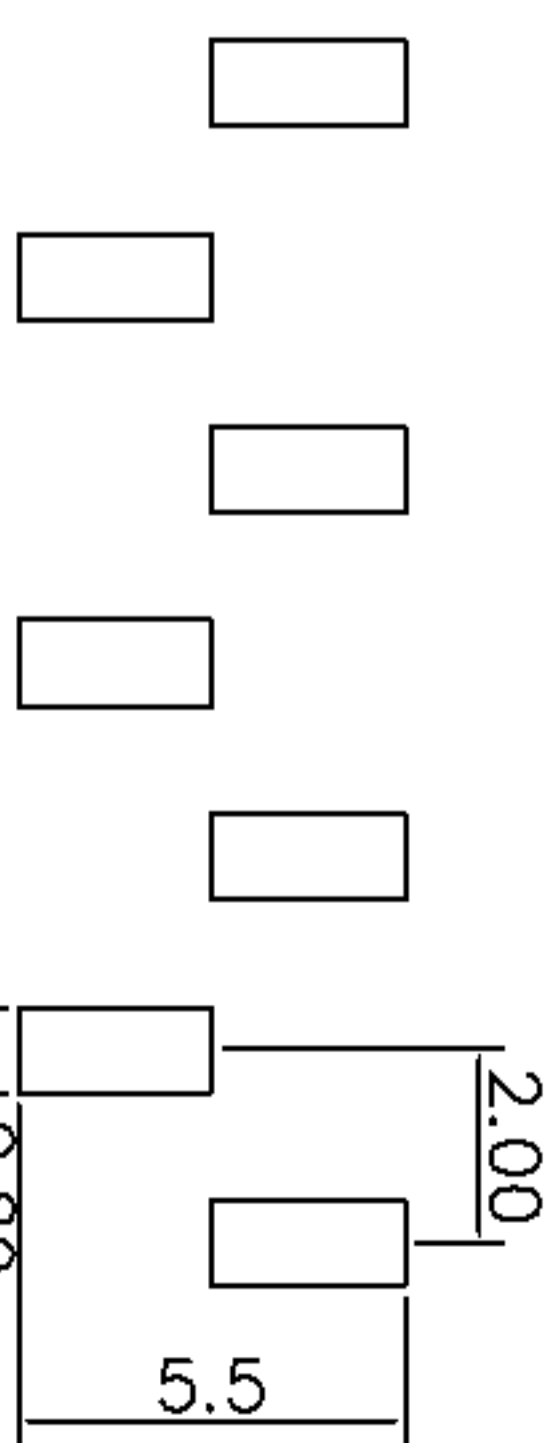


	A		
		新版图	
		/	
		2012.05.23	L2M

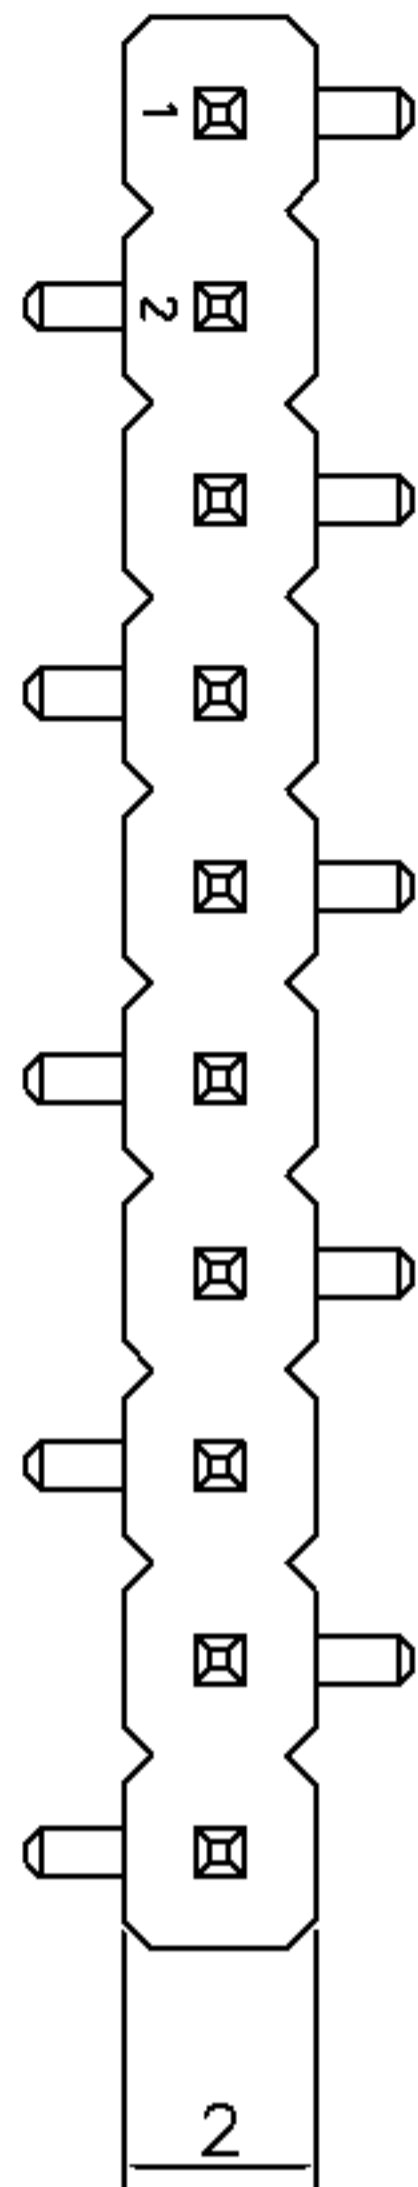


PCB Layout

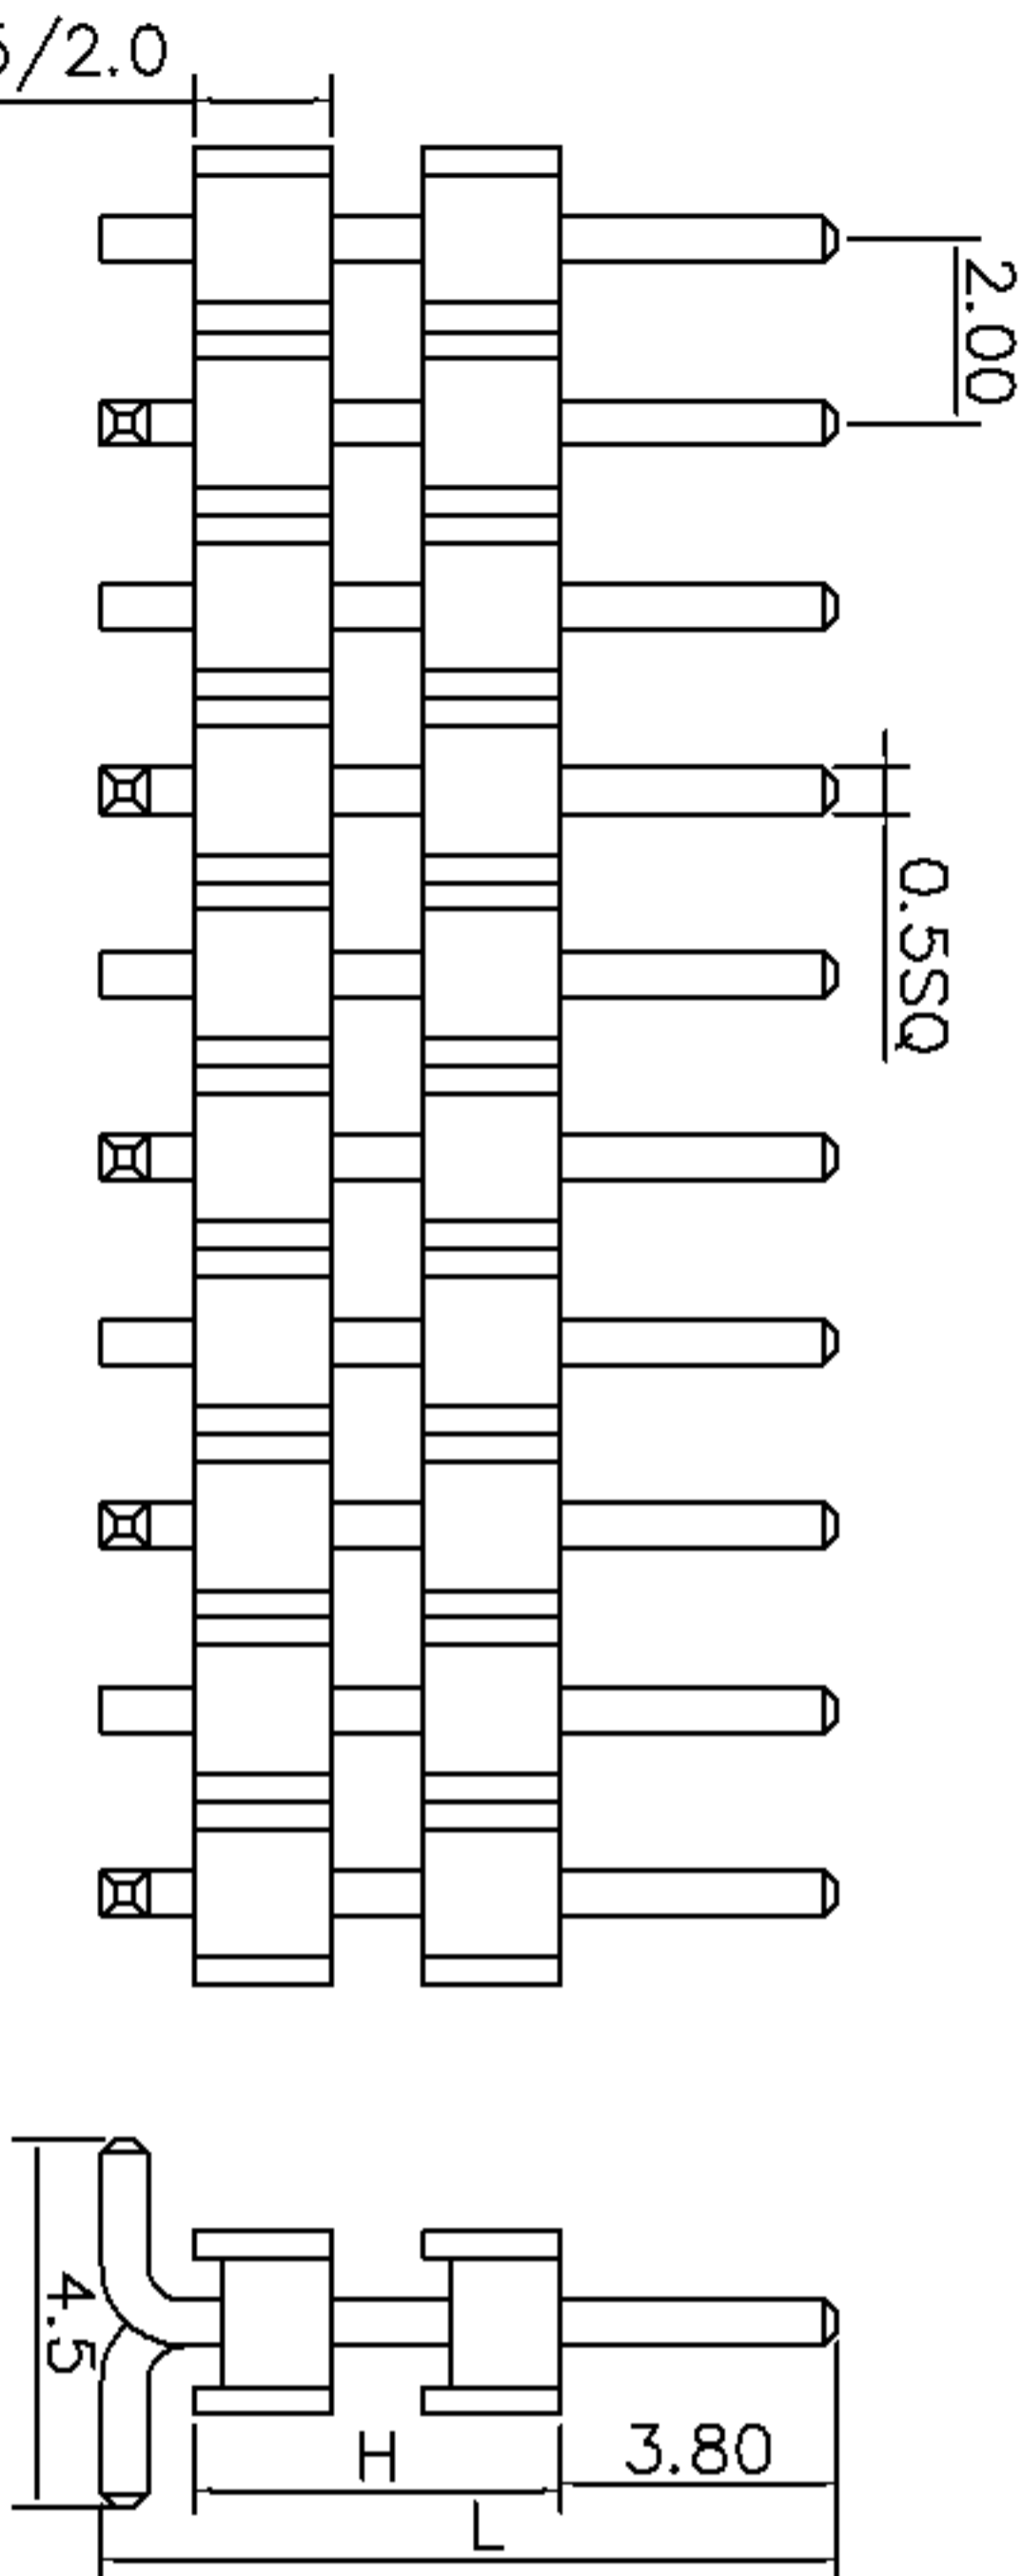

H、L的尺寸
可依客户要求订做

Technical Data:
Material:
Contact Material: Brass
Insulator Material: PA66+30%GF
Electrical:
Current rating: 1.5Amps/Contact max.
Contact resistance: $\leq 20\text{mohms/Contact}$
Insulation resistance: $\geq 1000\text{Mohms at } V=100\text{V}$
Withstanding Voltage: 450V AC/Minute
Mechanical:
Operating Temperature: Gold plated: $-55^{\circ}\text{C} \sim 105^{\circ}\text{C}$
Tin plated: $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$
Soldering Temperature: $260^{\circ}\text{C } 10\text{s Max.}$

1101-200M21XXA-H-L

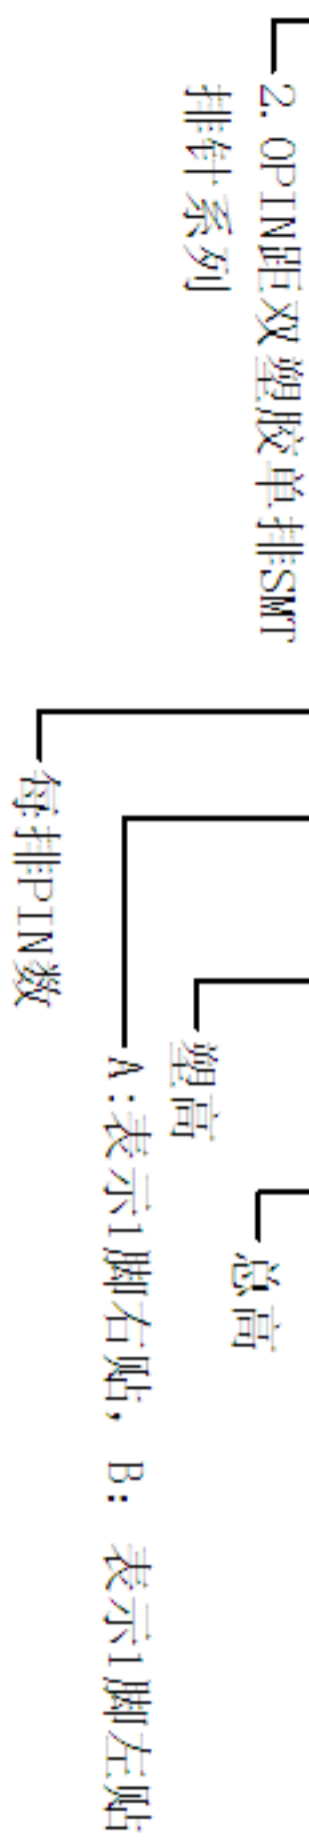

排针系列

2.0PIN距双塑胶单排SMT

每排PIN数

塑高

总高

A: 表示1脚右贴, B: 表示1脚左贴

TOLERANCE		ANGLE		DRAWN	DATE	 武汉宇恒电子有限公司 WUHAN YUHENG ELECTRONIC CO., LTD
ON	TOL			YSH	2012.05.23	
.XXX±	0.05			CHECKED	DATE	TITLE:
.XX⊥	0.15		1°	CLIENT APPROVED	DATE	排针系列-2.00 PIN距-单排-双塑胶-右1脚立贴
.X±	0.20		2°	RFQ NO		
X.±	0.30			CLIENT P/N		
				UNIT: mm	SCALE: free	
				FILE NO.:	YH20120602A007	