

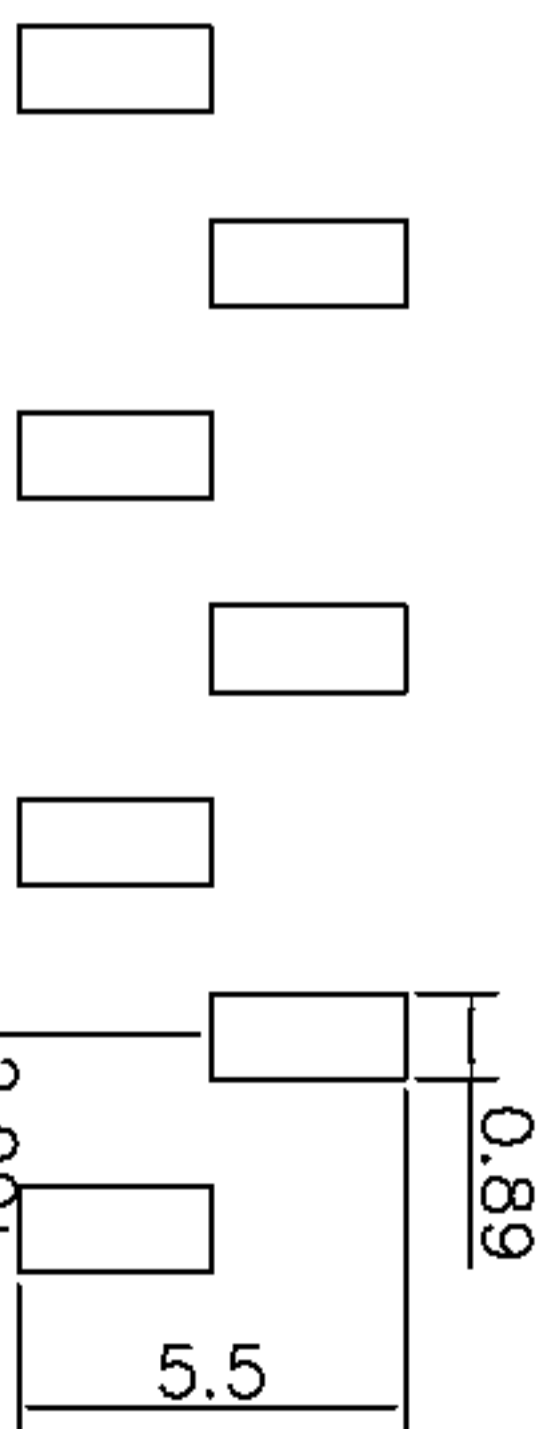


| | | | | |
|--|---|-----|------------|-----|
| | | | | |
| | A | | | |
| | | 新版图 | / | |
| | | | 2012.05.23 | LZW |

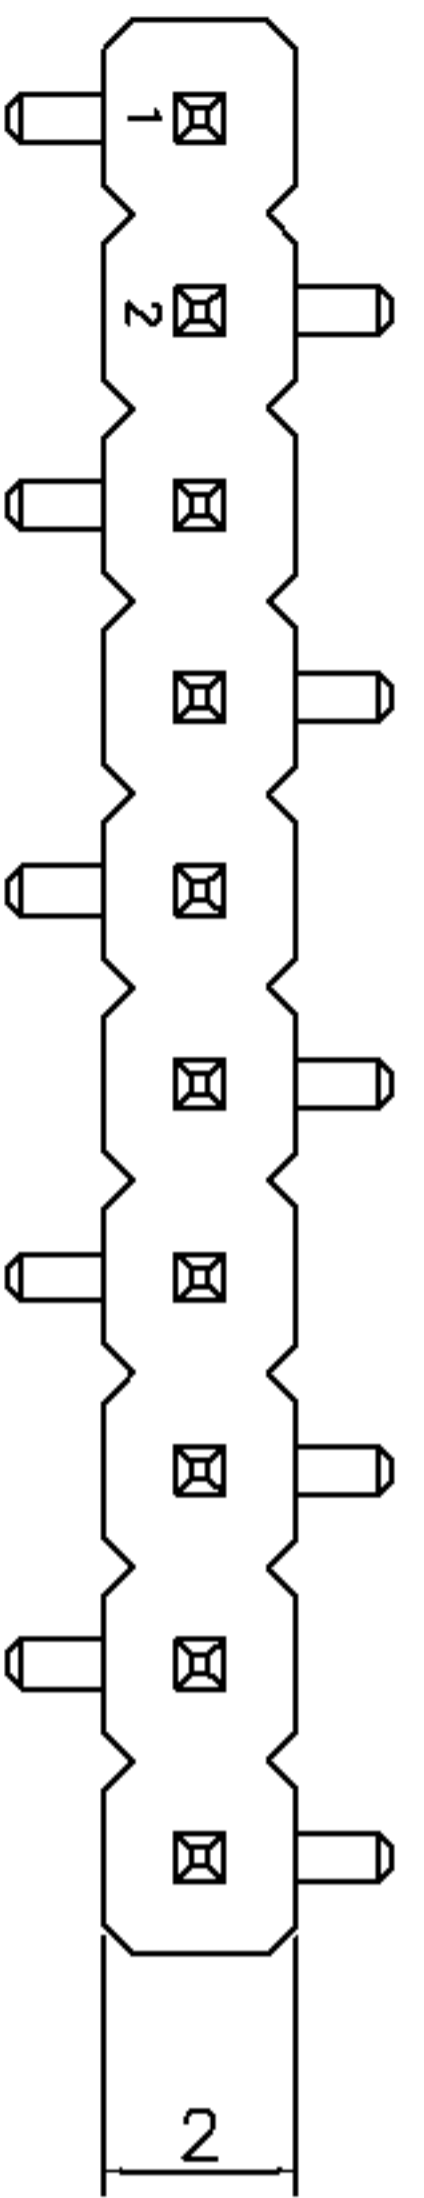

PCB Layout

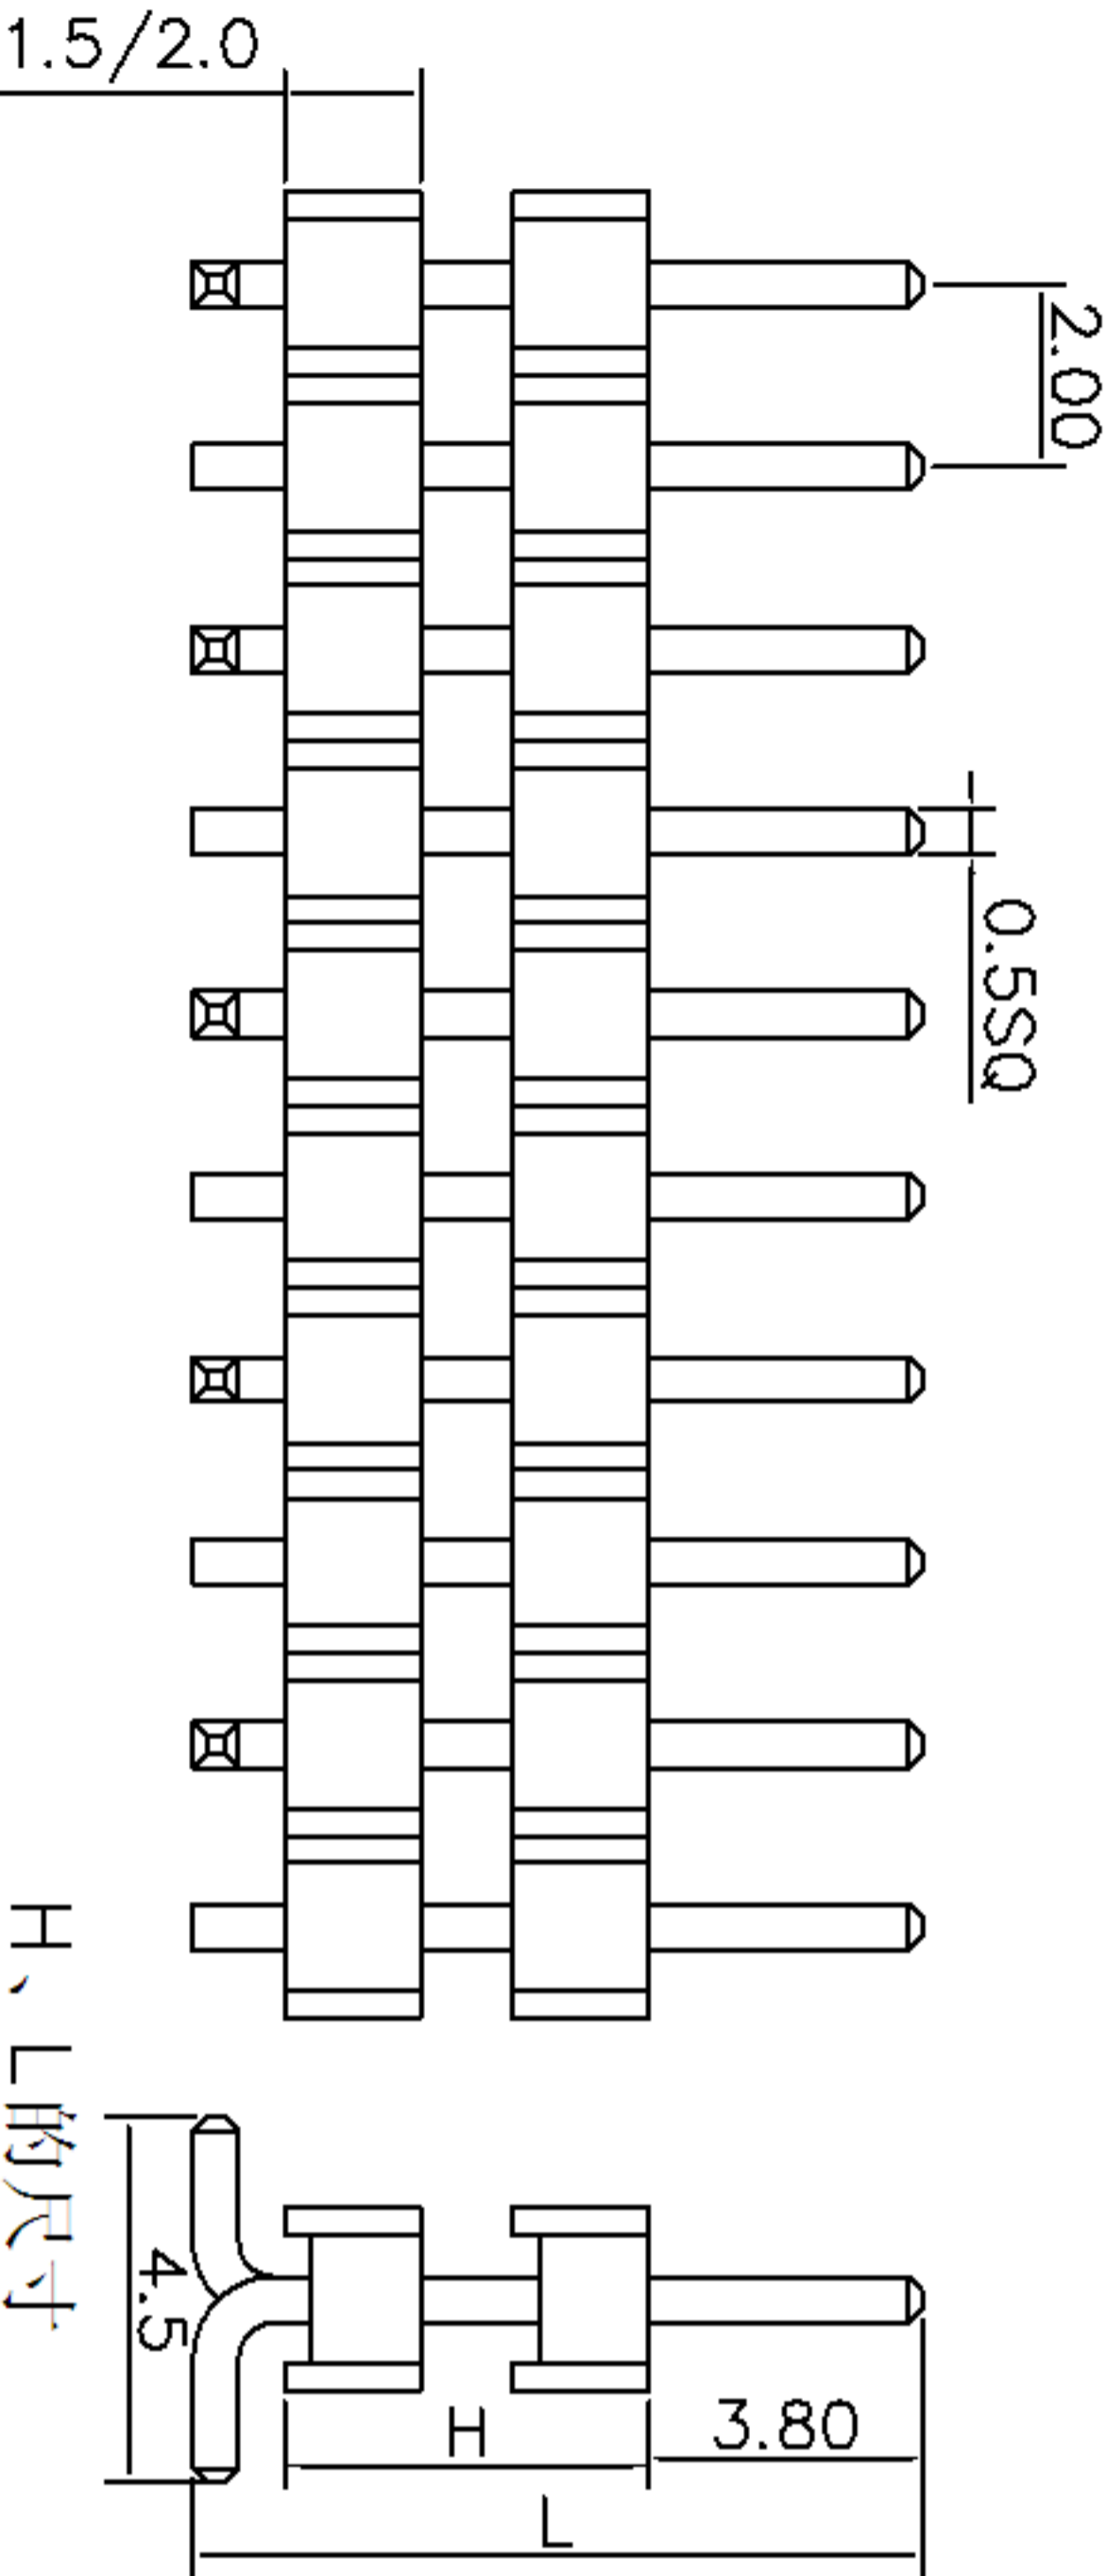

H、L的尺寸
可依客户要求订做

Technical Data:
 Material:
 Contact Material: Brass
 Insulator Material: PA66+30%GF
 Electrical:
 Current rating: 1.5Amps/Contact max.
 Contact resistance: $\leq 20\text{mohms/Contact}$
 Insulation resistance: $\geq 1000\text{Mohms at } V=100\text{V}$
 Withstanding Voltage: 450V AC/Minute
 Mechanical:
 Operating Temperature: Gold plated $:-55^{\circ}\text{C} \sim 105^{\circ}\text{C}$
 Tin plated $:-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$
 Soldering Temperature: $260^{\circ}\text{C } 10\text{s Max.}$

1101-200M21XXB-H--L
 2.0PIN距双塑胶单排SMT
 排针系列
 总高
 塑高
 A:表示1脚右贴, B:表示1脚左贴
 每排PIN数

| TOLERANCE | | ANGLE | |
|-----------|------|-------|--|
| TOL | ON | ANGLE | |
| .XXX ± | 0.05 | | |
| .XX ⊥ | 0.15 | 1° | |
| X ± | 0.20 | 2° | |
| X ± | 0.30 | | |

| | | |
|-----------------|------------|--|
| DRAWN | DATE | 武汉宇恒电子有限公司 WUHAN YUHENG ELECTRONIC CO., LTD |
| LZW | 2012.05.23 | |
| CHECKED | DATE | TITLE: |
| | | 排针系列-2.00 PIN距-单排-双塑胶-单排贴片型 |
| CLIENT APPROVED | DATE | RFQ NO |
| | | CLIENT P/N |
| | | UNIT: mm |
| | | SCALE: free |
| | | FILE NO.: YH20120602A008 |