


PCB LAYOUT

21.50±0.100

56.55±0.300

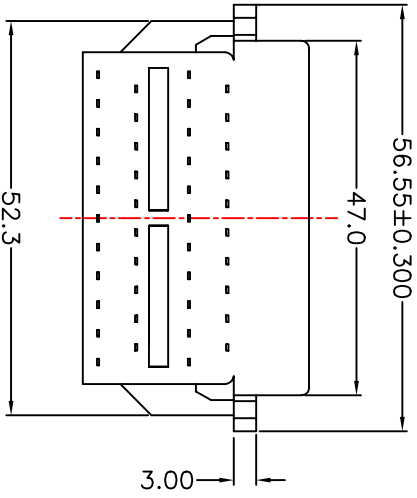

NOTES:

1. MATERIAL

- 1.1 Insulator: PC Or ABS
- 1.2 Contact: Brass
- 1.3 Contact Plated: Tin Plated

2. SPECIFICATION

- 2.1 Current Rate: 1 Amps
- 2.2 Insulator Resistance: 5000M Ohms Min. at 500V DC
- 2.3 Dielectric Strength: 1000V Per minute
- 2.4 Operation Temperature: -55C to +105C

ORDER INFORMATION

PART NO.	MATERIAL	COLOR
ASC+050L-4AC	PC	BLACK
ASC+050L-4AS	ABS	BLACK

DIMENSIONS TOLERANCE

METRIC

- 0 = ±.30
- .00 = ±.20
- .000 = ±.XXX
- .0000 = ±
- ANG. = ±2'

單位 (UNITS)	mm
數量 (QTY)	N/A
材料 (MATERIAL)	SEE NOTE
處理 (FINISH)	SEE NOTE
繪圖 (DRAW)	
設計 (DE'N)	
審核 (CHK'K)	
核准 (APP'D)	
料號 (PART NUMBER)	ASC+050L-4AC
圖號 (DRAW NUMBER)	RASC050L4AC
圖檔 (FILE NAME .DWG)	D-ZSB/CPT
比例 (SCALE)	1/1
圖紙 (SHEET)	A4
頁次 (SHEET)	1
版本 (REV.)	A

圖名 (NAME)

90度雙層母座A型連續式 PC

REV.	NOTES	DATE
A	RELEASED	27/02/2002