






REV.	NOTES	DATE
A	ASC+050L-4GSI代替料號:CS-8012-4211	2006/12/06
B	AMEND NOTES	2006/12/09
C	ASC+050L-4GC1材質為PC	2006/12/20
D	增加重點尺寸標示 	2007/02/05
E	SEE MARK 	2007/02/10



- NOTES:
- MATERIAL
    - Insulator:PC
    - Contact:Brass
    - Contact Plated:Tin Plated
    - Shield coat:SPCC
  - SPECIFICATION
    - Current Rate:1 Amps
    - Insulator Resistance::5000M Ohms Min. at 500V DC
    - Dielectric Strength:1000V Per minute
    - Operation Temperature:;-55°C to+105°C

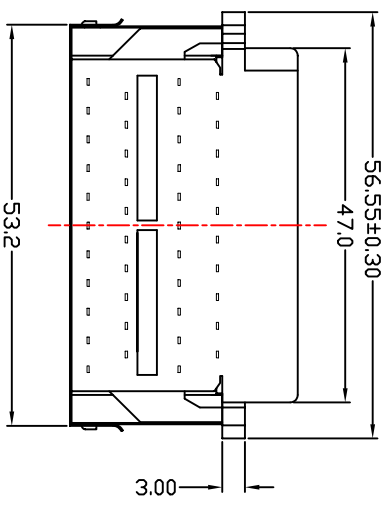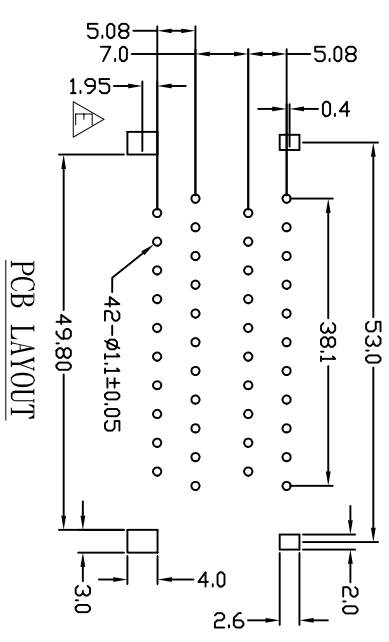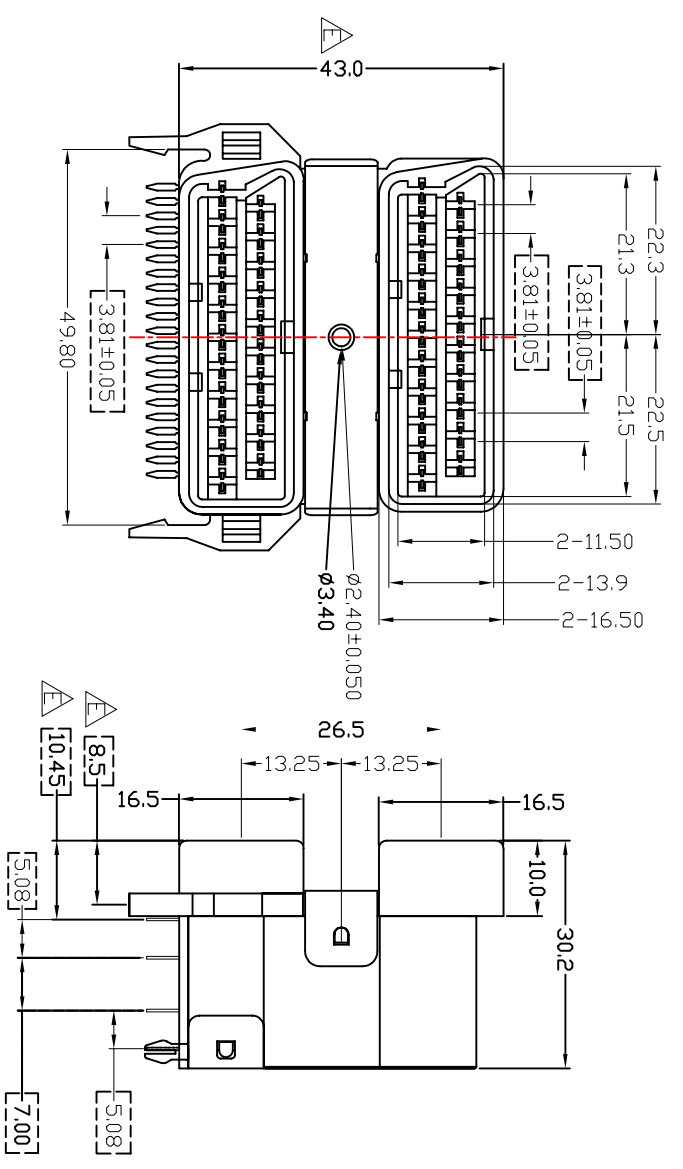

備注:

重點尺寸標示: 

DIMENSIONS TOLERANCE		圖名 (NAME)	
METRIC		90度雙層母座B型(加鐵殼)連體式無MARK	
.0= ±.30	單位(UNITS)	料號(PART NUMBER)	ASC+050L-4GSI
.00= ±.20	數量(QTY)	圖號(DRAW NUMBER)	RASC050L4GSI
.000= ±.XXX	材料(MTL)	圖檔(FILE NAME .DWG)	E:GCT/A/SC/05
ANG. = ± 2°	處理(FINISH)	比例(SCALE)	1/1
	繪圖(DRAW)	圖紙(SIZE)	A4
	設計(DE'N)	頁次(SHEET)	1
	審核(CH'K)	版本(REV.)	E
	核准(APP'D)		