
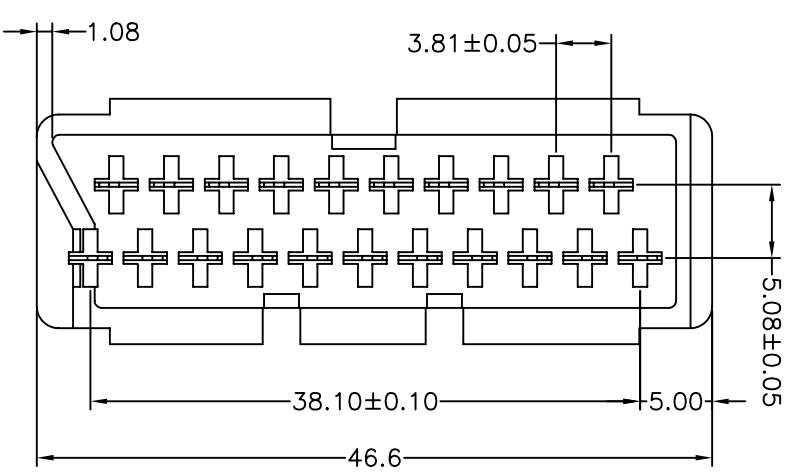


REV.	NOTES	DATE
A	RELEASED	2006/07/06
B	AMEND NOTES	2006/12/22

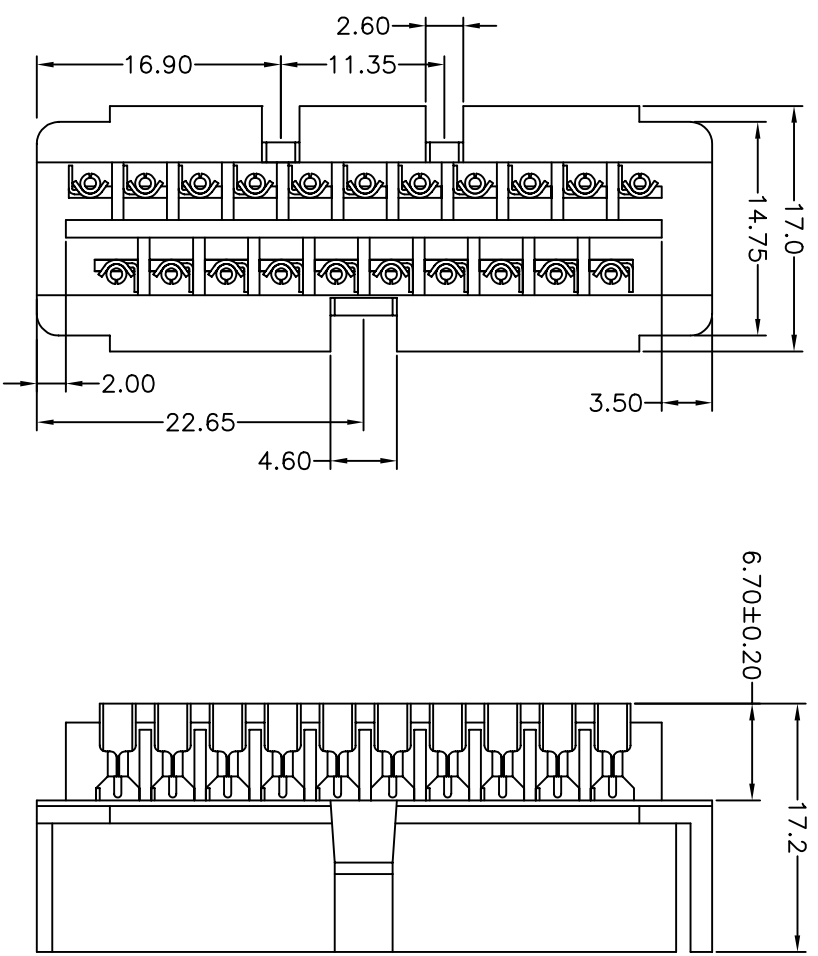

- NOTES:
- MATERIALS
    - Insulator: PC+30% Glass Fiber UL94V-0
    - Contact: BRASS 0.3T
  - SPECIFICATIONS
    - Current Rating: 3.0 Amp
    - Dielectric Strength: 1000V AC for one minute
    - Insulator Resistance: 1000M ohms Min
    - Contact Resistance: 25m ohms Max
    - Operation Temperature: -55°C to +105°C

Part No.	Contact Plating
ASC+0700-40C	Tin Plated
ASC+0700-10C	Gold Plated

DIMENSIONS TOLERANCE		METRIC	
0 = ±.3		0 = ±.3	
.00 = ±.20		.000 = ±.XXX	
.0000 = ±		.0000 = ±	
ANG. = ±2°			

單位 (UNITS)	mm
數量 (QTY)	N/A
材料 (M'T'L)	SEE NOTE
處理 (FINISH)	SEE NOTE

繪圖 (DRAW)	圖名 (NAME)
設計 (DE'N)	21P母座滿PIN 無毒
審核 (CH'K)	
核准 (APP' D)	

料號 (PART NUMBER)	ASC+0700-40C
圖號 (DRAW NUMBER) <td>RASC070040C</td>	RASC070040C
圖檔 (FILE NAME .DWG) <td>E:GCT/A/SC/07</td>	E:GCT/A/SC/07

比例 (SCALE)	圖紙 (SHEET)	頁次 (SHEET)	版次 (REV.)
1/1	A4	1	B