




| REV. | NOTES | DATE |
|------|-----------------------------|------------|
| A | RELEASED | 2004/06/11 |
| B | 修改圖面 | 2004/09/14 |
| C | 插入力為9.0KG MAX;拔出力為1.5KG MIN | 2006/12/08 |

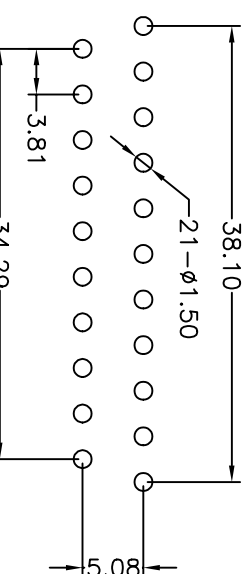

RECOMMEND P.C. BOARD LAYOUT

NOTES:

1. MATERIALS
 - 1.1 Insulator: PC
 - 1.2 Contact: Brass, 0.3T
2. SPECIFICATIONS
 - 2.1 Current Rating: 3 Amp
 - 2.2 Dielectric Strength: 1000V AC for one minute
 - 2.3 Insulator Resistance: 1000M ohms Min
 - 2.4 Contact Resistance: 25m ohms Max
 - 2.5 Operation temperature: -55°C to +105°C
 - 2.6 INSERTION FORCE: 9.0KG MAX
 - 2.7 WITHDRAWAL FORCE: 1.5KG MIN

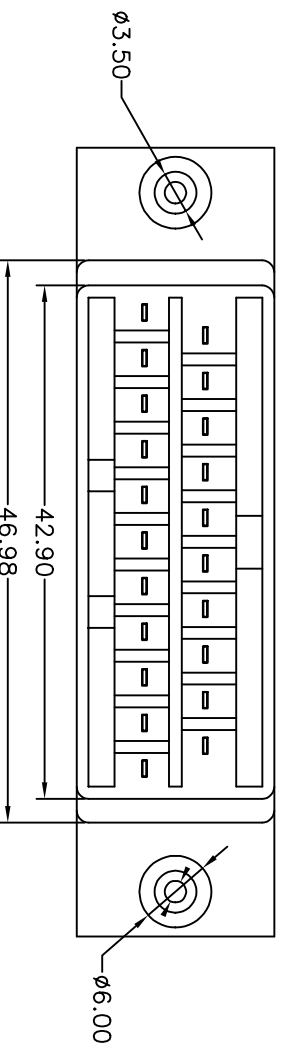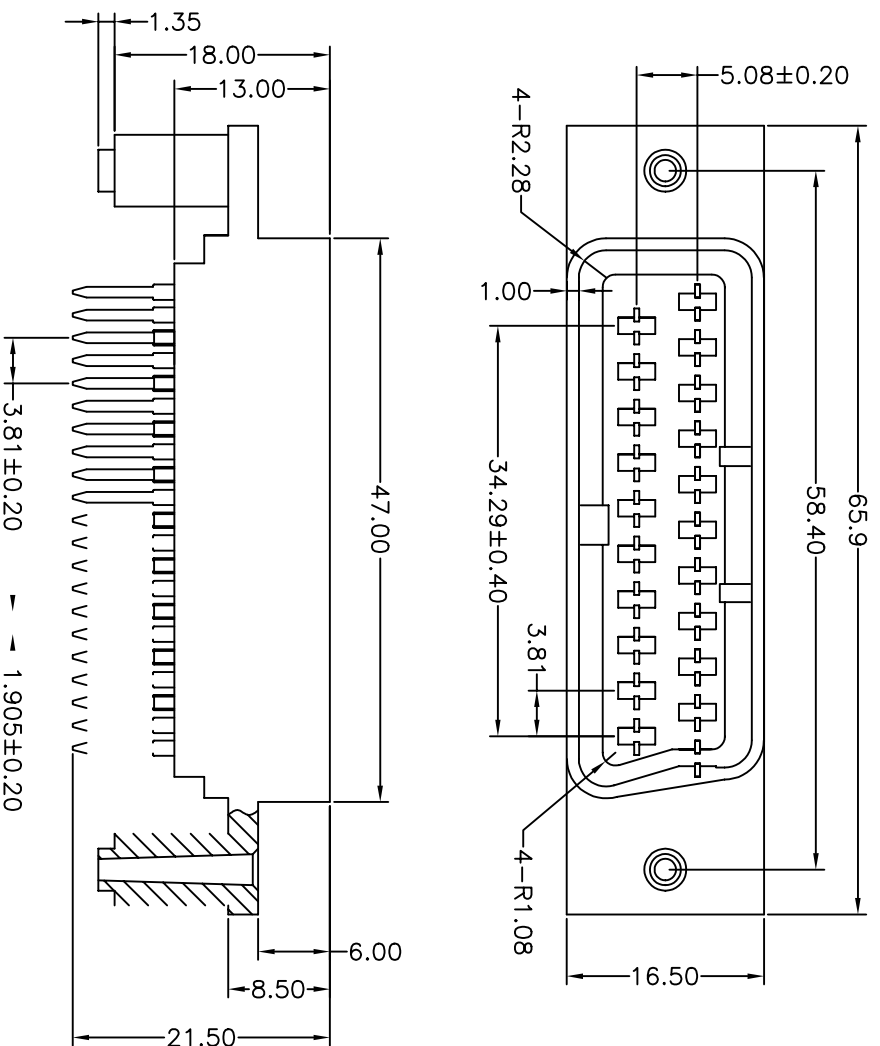

DIMENSIONS TOLERANCE

| METRIC |
|----------------|
| 0 = ± 0.3 |
| .00 = ± .20 |
| .0000 = ± .XXX |
| ANG = ± 2° |

| 單位 (UNITS) | 數量 (QTY) | 材料 (MATERIAL) | 處理 (FINISH) | 繪圖 (DRAW) | 圖名 (NAME) |
|-------------|----------|---------------------|----------------|----------------------|-----------|
| SEE NOTE | SEE NOTE | SEE NOTE | SEE NOTE | 180度母座錫 有耳 (加固定柱) WD | |
| 設計 (DE'N) | | 料號 (PART NUMBER) | ASC+0810-40C2 | | |
| 審核 (CHK) | | 圖號 (DRAW NUMBER) | RASC081040C2 | | |
| 核准 (APP' D) | | 圖檔 (FILE NAME .DWG) | E:GCT/AV/SC/08 | | |
| | | 比例 (SCALE) | 1/1 | 圖紙 (SHEET) | A4 |
| | | | | 頁次 (SHEET) | 1 |
| | | | | 版次 (REV.) | C |