
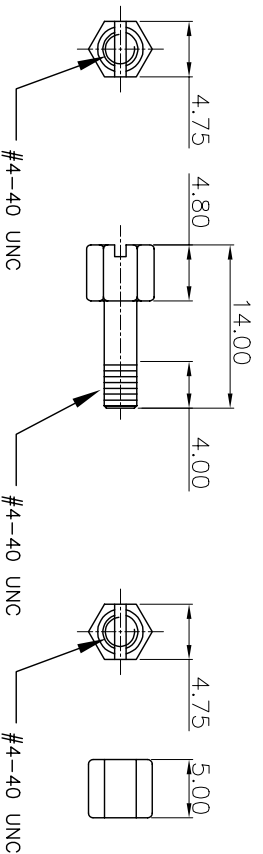

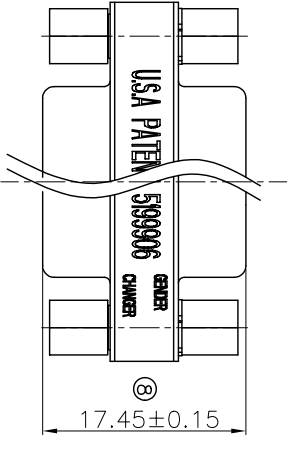



REV	MODIFICATION	DATE	DRAW	APPROVE
A	NEW DWG	2007.08.05	HUANG	KEVIN

NOTES
 MARK ⓧ IS MAJOR TEST DIMENSION
 1: MATERIAL:
 HOUSING: P BT+30%G.F, BLOVE, UL94V-0
 CONTACT: BRASS
 2: FINISH:
 CONTACT PLATING: GOLD PLATED
 3: SPECIFICATION:
 CURRENT RATING: 5A
 WITHSTANDING VOLTAGE: AC 1000V 5s
 INSULATION RESISTANCE: 1000M Ω 500V DC
 OPERATING TEMPERATURE: -55°C~105 °C

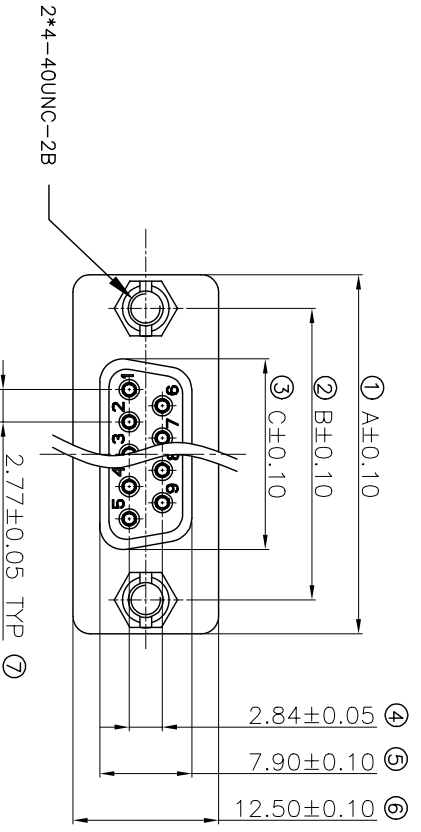

Screw specification

PIN NO.	DIM A	DIM B	DIM C	P/N
9P	30.80	24.99	16.35	182-009FBXPB01
15P	39.20	33.30	24.70	182-015FBXPB01
25P	53.05	47.04	38.40	182-025FBXPB01

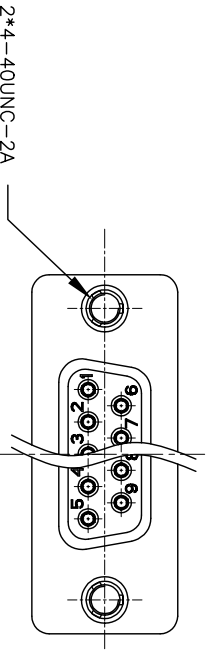

UNLESS OTHERWISE SPECIFIED
 公差參考表

X.X	±0.25	X.X°	±3°
X.XX	±0.15	X.XX°	±1°
X.XXX	±0.05	X.XXX°	±0.5°

TITLE: 產品名稱 : DB 1.0 FEMALE轉接头
 PRODUCT NO: 產品編號 : 182-XXXXFBXPB01
 APPD: KEVIN
 核准 :
 CHECK: TENA
 校對 :
 DRAW: HUANG
 繪圖 :

DATE	SCALE	UNIT	TYPE	PAGE
2007.08.05	FREE	MM	H	1/1