



2020-2120 CONNECTOR

2020T

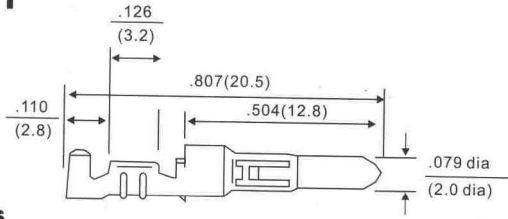

2120T

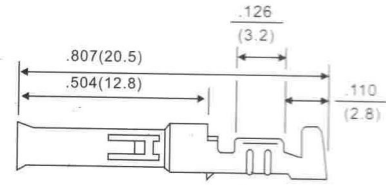

Specifications

- Current rating: 15A AC, DC MAX.
- Voltage rating: 300V AC, DC (Single pole: 600V)
- Temperature range: -25°C ~ +90°C
(Including temperature rise)
- Contact resistance: initial value / 7mΩ Max.
After environmental testing / 15mΩ max.

- Insulation resistance: 1,000M Ω min
- Withstand voltage: 1,500V AC/minute
- Applicable wires: AWG #24~#14
0.2~2.0mm
- Applicable P.C.B thickness: 0.031" ~ 0.079"
(0.8~2.0mm)

- Integrally molded polarization
- Nyoln66 UL 94V-0 and UL 94V-2
- 2,3,4,6,9,12,15,circuit versions
- Standard color natural. Can be color coded in black, brown, green, gray, orange, amber, red or yellow
- Positive locking

CIRCUITS	MAX RATEC		DIMENSIONAL INFORMATION	
	AMP	VOLT-AGE	PLUG	RECECTACLE
1	15A	600V	2020-1 	2120-1
2	15A	300V	2020-2 	2120-2
3	14A	300V	2020-3 	2120-3

CIR CUITS	MAX RATEC		DIMENSIONAL INFORMATION			
	AMP	VOLT- AGE	PLUG		RECETACLE	
4	13A	300V	2020-4-1 	2140-4-1 		
4	13A	300V	2020-4 	2120-4 		
6	12A	300V	2020-6 	2120-6 		
9	10A	300V	2020-9 	2120-9 		
12	9A	300V	2020-12 	2120-12 		
15	9A	300V	2020-15 	2120-15 		