




8	
REV.	ECN.NO.
A	RELEASED
DATE	



VIEW O
SCALE 2:1

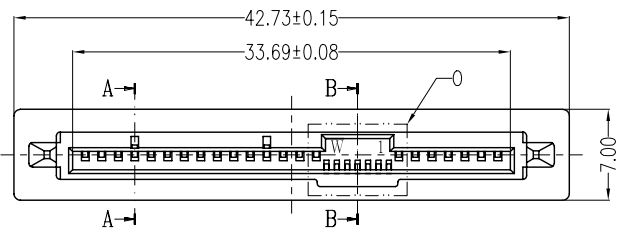

SECTION A-A

NOTES:

***Material**

Housing: LCP, UL 94V-0 rated, Color: Black;
 Contact: Phosphor Bronze;
 Plating: Gold plating over Nickel on contact area; Tin plating on solder tail.
 Harpoon: Brass;
 Plating: Tin plating over Nickel.

***Mechanical**

Insertion Force: 25N max.
 Withdrawal Force: 5N min.
 Durability: 500 cycles





***Electrical Specification**

Current Rating: 1 Ampere per contact;
 Contact Resistance: 30 Milliohms max.
 Insulation Resistance: 1000 megohms min.
 Dielectric Withstanding Voltage: 500 V AC.



***Environmental**

Operating Temperature: 0° C to +55° C


***How to order**

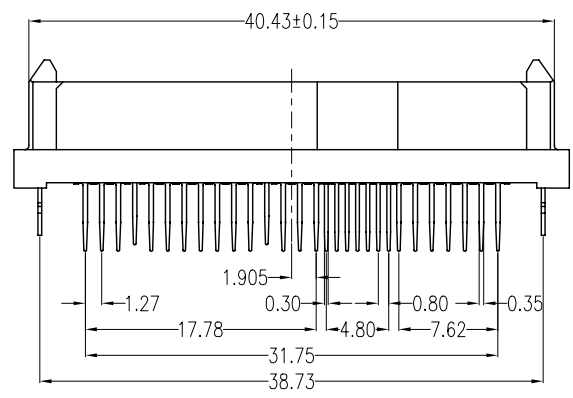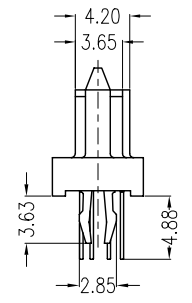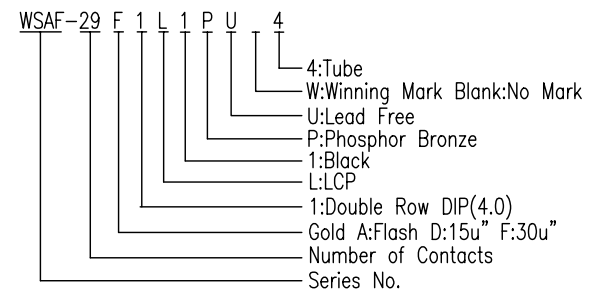

SECTION B-B

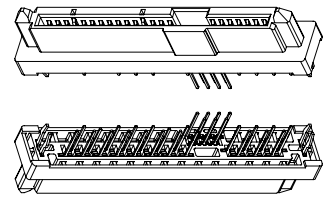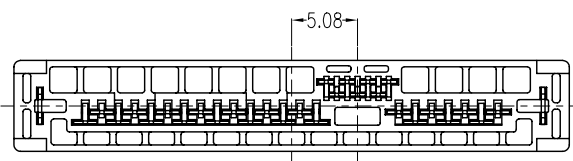

Product 3D Dwg

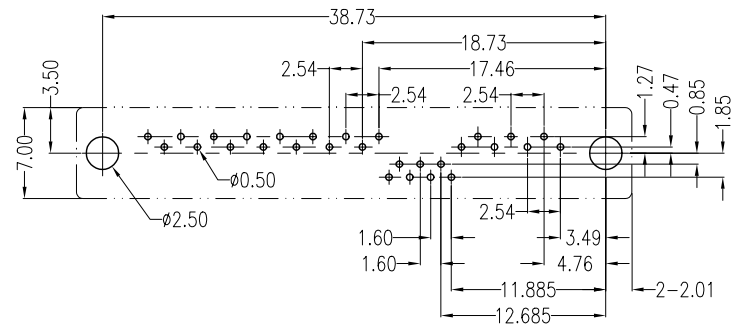

PCB LAYOUT

REV		Units		mm		Scale		5:3		Drawing By		Data			
		Tolerance Unless		Otherwise Specified						Reviewed By		Data			
		.X		~ ±0.38						Date					
		.XX		~ ±0.25						Sheet		1 of 1		Title	
		.XXX		~ ±0.20						Approval By		Data		SAS 29P Lengthen Double Row DIP Female (4.0) CRT	
		Angle		~ ± 3°						Third Angle Projection				Drawing No.	
														REV A	